

Products > Jewel Bearings > Ring Jewel Assemblies > RS-280-O

Ring Jewel Assemblies - RS-280-O


Specifications

Model	RS-280-O
Inside Diameter	.0300/.0301"
Outside Diameter	#6-56 NS2 Screw
Length	.213/.223"
Material	Brass-Nickel-Plated




Description

Ring Jewels can be mounted into bushings or screws. This style can ease your mounting of the bearing into your final instrument. A ring jewel can be mounted into a plain bushing or into a screw to be coupled with an endstone. To assist with fine tuning assembly for load applications Ring Jewel Assemblies can also be mounted with or without a spring. Applications include Flow Meters, Gauges, Meters, Indicators, Aircraft Instruments, Gyros and Watches **Model Code:** B=Bombe, C=Cup, O=Olive, E=Endstone

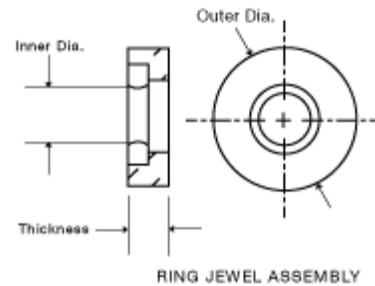

RING JEWEL ASSEMBLY

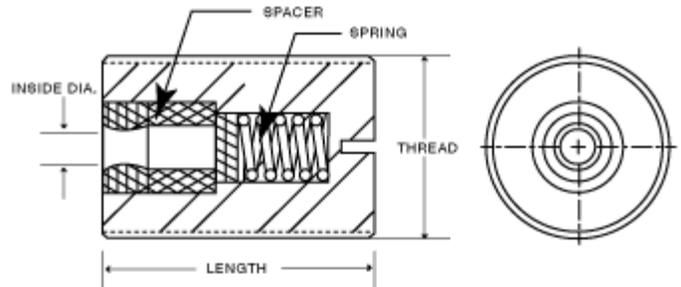

SPRING-LOADED ASSEMBLY

NOT SEEING EXACTLY WHAT YOU NEED?

We specialize in creating a wide range of custom optical components and custom mechanical components including a variety of shapes - from internal holes and tapers to outer flanges, angles and surface finishes. Contact us and we will consult with you to create a custom component that meets all of your specifications.